

■ **General Characteristics**

Item	Data
Standby Power (kVA)	1875
Standby Power (kW)	1500
Prime Power (kVA)	1563
Prime Power (kW)	1260
Power Factor (Cos Phi)	0.8
Diesel Engine	KTA50-G9
Frequency (Hz)	60
Rated Speed (rpm)	1800
Phase	3
Standard Voltage (V)	440/254
Available Voltages (V)	220/127 or 480/277



● **Power Definition**


Standby Power(ESP): The standby power rating is applicable for supply emergency power in variable load applications in accordance with ISO8528-1, overload is not allowed.

Prime Power(PRP): The prime power is available for an unlimited number of annual operating hours in variable load applications, in accordance with ISO8528-1.

● **Terms of use**

According to the standard, the nominal power assigned by the genset is given for 25 °C air inlet temperature, of a barometric pressure of 100 kPa (100m A.S.L) and 30%.

■ **Dimensions & Weights & Fuel Tank**

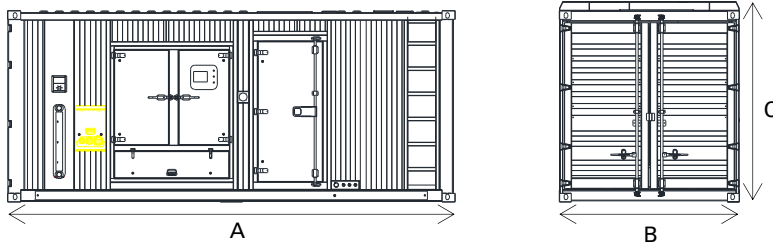

Note: General configuration not to be used for installation. See general dimension drawings for detail.

Model	Constructure	Dim "A" mm	Dim "B" mm	Dim "C" mm	Dry Weight kg	Fuel Tank Capacity L
VC1875-6	Open set	5520	2270	2450	10850	/
VC1875-6	20ft High container	6058	2438	2896	15350	/

■ **Engine Data**

General Engine Data	
Engine brand	Cummins
Engine model	KTA50-G9
Engine type	4-stroke diesel
Governor type	Electronic
Injection type	Direct
Aspiration type	Turbocharged and Low Temperature Aftercooled
Number of cylinders and arrangement	16-V
Bore and stroke (mm*mm)	159*159
Displacement (L)	50.3
Cooling system	Water-cooled
Lube oil consumption with full load	0.5%-1% of fuel consumption
Compression Ratio	13.9:1
Air Filter	Dry
Fuel Consumption	
Fuel Consumption @ 100% load ESP (L/H)	392
Fuel Consumption @ 100% load PRP (L/H)	330
Fuel Consumption @ 75% load PRP (L/H)	257
Fuel Consumption @ 50% load PRP (L/H)	180
Air System	
Intake air flow (L/s)	1930
Cooling air flow (L/s)	/
Exhaust System	
Maximum exhaust temperature (°C)	515
Exhaust gas flow (L/s)	4530
Maximum allowed back pressure (kPa)	10
Starting System	
Starting power(kW)	/
Recommended battery (Ah)	120
Number of Batteries	4
Auxiliary voltage (Vdc)	24
Oil System	
Engine oil capacity (L)	204
Cooling System	
Total coolant capacity (L)	174

■ **Alternator Data**

Alternator Data	
Number of phase	3
Power factor (Cos Phi)	0.8
Poles	4
Winding Connections (standard)	Star-serie
Insulation	H class
Enclosure(according IEC-34-5)	IP23
Excitation system	Self-excited, brushless
Voltage regulator	AVR (Electronic)
No. of bearings	Single bearing
Coupling system	Flexible disc
Coating type	Standard (Vacuum impregnation)

■ **Control Module-DSE 6120**



Key Features:

- 6 configurable DC outputs-Provides multiple installation options.
- 4 configurable analogue/digital inputs.- Provides multiple installation options.
- 8 configurable digital inputs.-Provides multiple installation options.
- 3-phase generator and mains (utility) sensing.- Provides true generator and mains (utility) sensing.
- Automatic load transfer control.-Ensures the load can be transferred manually/automatically between mains (utility) and generator power.
- Generator & mains current and power monitoring.-Provides convenience of monitoring and protection of the generator or monitoring of the load current.
- Internal PLC editor.-Adds increased flexibility to the product.
- Breaker control buttons on front fascia.-Simple breaker control at the touch of a button.
- Fuel and start outputs configurable when using CAN.-Provides multiple installation options.
- Support for 0-10 V & 4-20mA oil pressure senders – Flexibility for use with multiple sensors and engine types.
- Large back-lit text LCD display – Clear and concise information display.
- Cold weather operation – Ensures display works in extreme cold conditions.
- Generator/load current monitoring & protection – Continuous monitoring for safety and performance.
- Configurable analogue/digital inputs (9) – Multiple installation options.
- Configurable DC, volt-free, and staged loading outputs (6) – Full generator load control.
- CAN, MPU & alternator speed sensing – Selectable based on engine type.
- Tier 4 CAN engine support – Compatibility with modern electronic engine technology.
- Configurable event log (10) – Access to historical alarms and operational status.
- DSE Configuration Suite PC Software – User-friendly configuration, control, and monitoring.
- Fuel and start outputs (configurable on CAN) – Multiple installation options.
- This concise list covers all the key features of the system.