


# VB4125-5

DIESEL GENERATOR SET / OPEN + CONTAINERIZED



OPEN SET

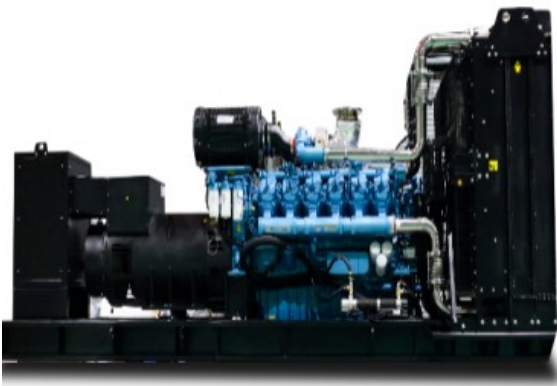

CONTAINERIZED SET

4125

kVA

STANDBY POWER

3750

kVA

PRIME POWER

50

Hz

FREQUENCY

400/230

V

VOLTAGE

Baudouin 16M55G4000/5

3 phase · 0.8 PF · 1500 rpm

CONFIGURATION COMPARISON

| Configuration     | Dimensions (L × W × H) | Dry weight | Fuel tank |
|-------------------|------------------------|------------|-----------|
| Open set          | 7820 × 3000 × 3500 mm  | 22150 kg   | /         |
| Containerized Set | Customized Dimension   | 30650 kg   | /         |

Performance, engine, alternator and controller data are common to both configurations.

# GENERAL CHARACTERISTICS

VB4125-5 · 50 Hz · 3 Phase

## RATED PERFORMANCE

|                        |                   |
|------------------------|-------------------|
| Standby Power (kVA)    | 4125              |
| Standby Power (kW)     | 3300              |
| Prime Power (kVA)      | 3750              |
| Prime Power (kW)       | 3000              |
| Power Factor (Cos Phi) | 0.8               |
| Diesel Engine          | 16M55G4000/5      |
| Frequency (Hz)         | 50                |
| Rated Speed (rpm)      | 1500              |
| Phase                  | 3                 |
| Standard Voltage (V)   | 400/230           |
| Available Voltages (V) | 380/220 · 415/240 |

## POWER DEFINITIONS

### STANDBY POWER (ESP)

Available for supplying emergency power during a utility interruption. The stated rating follows ISO 8528-1.

### PRIME POWER (PRP)

Available for an unlimited number of annual operating hours in variable-load applications, in accordance with ISO 8528-1.

### TERMS OF USE

Nominal power is stated at 25 °C inlet-air temperature, 100 kPa barometric pressure (100 m A.S.L.) and 30% relative humidity.

## RATED OUTPUT CURRENT BY VOLTAGE

| Rated voltage | Standby current (4125 kVA) | Prime current (3750 kVA) |
|---------------|----------------------------|--------------------------|
| 380/220 V     | 6267.3 A                   | 5697.5 A                 |
| 400/230 V     | 5953.9 A                   | 5412.7 A                 |
| 415/240 V     | 5738.7 A                   | 5217.0 A                 |

# ENGINE DATA

Baudouin 16M55G4000/5

## GENERAL ENGINE DATA

|                           |                              |
|---------------------------|------------------------------|
| Engine brand              | Baudouin                     |
| Engine model              | 16M55G4000/5                 |
| Engine type               | 4-stroke diesel              |
| Governor type             | ECU                          |
| Injection type            | Direct                       |
| Aspiration type           | Turbocharged and Aftercooled |
| Cylinders and arrangement | 16-V                         |

## FUEL CONSUMPTION

|               |           |
|---------------|-----------|
| 100% load ESP | 843.4 L/h |
| 100% load PRP | 755.1 L/h |
| 75% load PRP  | 557.2 L/h |
| 50% load PRP  | 384.2 L/h |

## AIR SYSTEM

|                  |          |
|------------------|----------|
| Intake air flow  | 3820 L/s |
| Cooling air flow | /        |

## GENERAL ENGINE DATA

|                                   |                             |
|-----------------------------------|-----------------------------|
| Bore × stroke                     | 180 × 215 mm                |
| Displacement                      | 87.5 L                      |
| Cooling system                    | Water-cooled                |
| Lube oil consumption at full load | 0.5%-1% of fuel consumption |
| Compression ratio                 | 16.5:1                      |
| Air filter                        | Dry                         |

## EXHAUST SYSTEM

|                               |           |
|-------------------------------|-----------|
| Maximum exhaust temperature   | 550 °C    |
| Exhaust gas flow              | 12245 L/s |
| Maximum allowed back pressure | 15 kPa    |

## STARTING SYSTEM

|                     |           |
|---------------------|-----------|
| Starting power      | 2 x 10 kW |
| Recommended battery | 200 Ah    |
| Number of batteries | 4         |
| Auxiliary voltage   | 24 VDC    |

## OIL AND COOLING CAPACITIES

|                        |         |
|------------------------|---------|
| Engine oil capacity    | 582 L   |
| Total coolant capacity | 780.5 L |

# ALTERNATOR DATA

3-phase · Brushless · Electronic AVR

## GENERAL ALTERNATOR DATA

|                                   |                                |
|-----------------------------------|--------------------------------|
| Number of phases                  | 3                              |
| Power factor (Cos Phi)            | 0.8                            |
| Poles                             | 4                              |
| Winding connections (standard)    | Star-series                    |
| Insulation                        | H class                        |
| Enclosure (according to IEC 34-5) | IP23                           |
| Excitation system                 | Self-excited, brushless        |
| Voltage regulator                 | AVR (Electronic)               |
| Number of bearings                | Single bearing                 |
| Coupling system                   | Flexible disc                  |
| Coating type                      | Standard (vacuum impregnation) |

# CONTROL MODULE

Deep Sea DSE6120



SINGLE GEN-SET CONTROL

## AMF CONTROL

Automatic mains failure controller for one gen-set, with three-phase mains and generator monitoring, flexible I/O and electronic or non-electronic engine versions.

### CORE FUNCTIONS

|    |                                                            |    |                                                          |
|----|------------------------------------------------------------|----|----------------------------------------------------------|
| 01 | Automatic transfer between mains and generator power       | 05 | Event log for 10 events plus engine-hours counter        |
| 02 | 3-phase mains and generator voltage monitoring             | 06 | 6 digital inputs and 3 analog sender inputs              |
| 03 | Generator current monitoring and protection                | 07 | Six outputs; configuration depends on the engine version |
| 04 | CAN-engine or magnetic-pick-up/alternator-sensing versions | 08 | PC/front-panel configuration; optional IP65 front gasket |

# CONNECTIVITY

DSE6120 · Interfaces, sensing and I/O

USB                      CAN / MPU                      6 INPUTS                      6 OUTPUTS

## COMMUNICATION AND MONITORING FEATURES

- |    |                                                                  |    |                                                                     |
|----|------------------------------------------------------------------|----|---------------------------------------------------------------------|
| 01 | USB connects to DSE Configuration Suite for controller setup     | 05 | Six digital inputs and three analog senders support field signals   |
| 02 | Choose CAN-engine or magnetic-pick-up/alternator-sensing version | 06 | Four outputs are configurable on MPU/alternator version; six on CAN |
| 03 | DSE6120 includes dedicated 3-phase mains sensing                 | 07 | Remote-start input, test mode and configurable timers are included  |
| 04 | 3-phase generator voltage and current monitoring is built in     |    |                                                                     |

### ORDERING OPTIONS

#### CAN ENGINE VERSION · MPU / ALTERNATOR VERSION

Engine sensing and output configuration depend on the selected controller variant.